



ORIENTABLE

Gamme VOLASUN



CARACTERISTIQUES

 Poids en m² 10 Kg



 DIMENSOINS
 MAXIMALE CONSEILEES L 2500 mm X H 3000 mm


tableau des conversions Hauteur lumière / Hauteur finie

lumière	finie	lumière	finie	lumière	finie
800	985	1515	1855	2285	2735
855	1095	1570	1920	2340	2790
910	1150	1625	1965	2395	2900
965	1205	1680	2020	2450	2955
1020	1250	1735	2075	2505	3010
1075	1315	1790	2130	2560	3065
1130	1425	1845	2185	2615	3175
1185	1480	1900	2295	2670	3230
1240	1535	1955	2350	2725	3285
1295	1590	2010	2405	2780	3340
1350	1700	2065	2460	2835	3395
1405	1755	2120	2570	2890	3505
1460	1810	2175	2625	2945	3560
1515	1855	2230	2680	3000	3615

Tableau des encombrements

Hauteur	enroulement
800	195
1200	205
1400	210
1600	212
1800	217
2000	228
2200	231
2400	240
2600	243
2800	250
3000	255

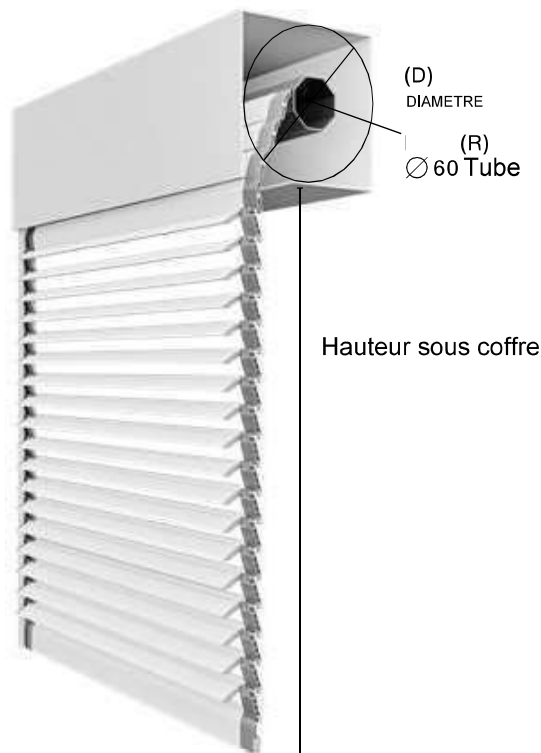


Guide coulisses conseillés

RAL Standard Laquage

RAL Standard Laquage


GATS 001N



€12.54/ml

€21.31/ml


GATS 75



€31.34/ml

€42.62/ml


GATS 002N



€12.54/ml

€21.31/ml


INCASSO 75



€21.23/ml


€29.70/ml

GATS 004N



€12.54/ml

€21.31/ml

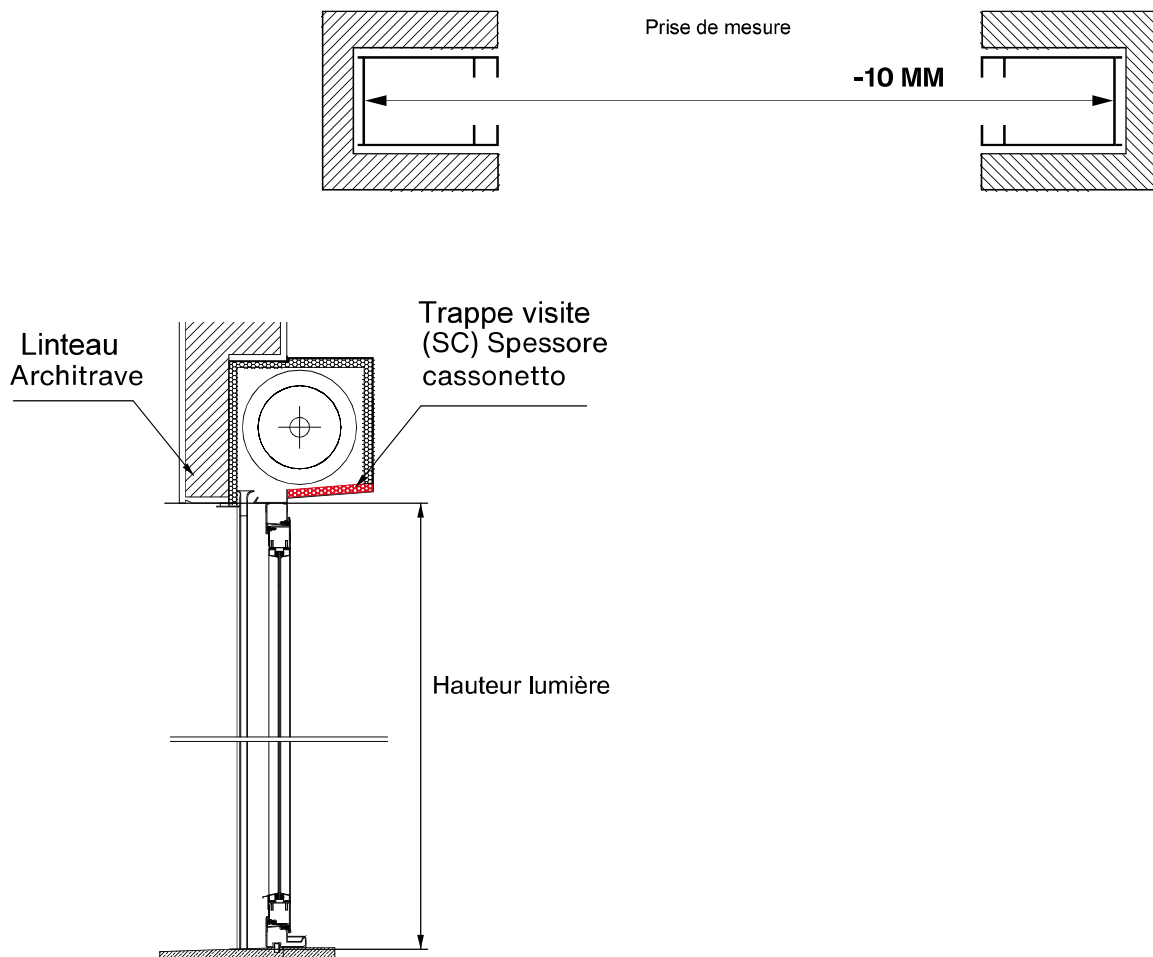

RAL STANDARD : 9010 / 1013 / 7001 / 7035 / Marron f206 / Vert f222

RAL ACCESSOIRE : Blanc / Marron / Vert / 7035 / 7016